

# guide to tow hitches




# FWE Tow Hitches

Our hitch systems combine the world-renowned quality of FWE in addition to the enhanced portability to take your equipment anywhere. All hitch hinges are designed to fold up and lock, allowing for easy maneuvering while not towing. All FWE hitches come with a powder coated surface that is more resistant against scratches, chipping, fading, and corrosion. By adding one of our three different hitch styles to your order, you increase the mobility of many units FWE offers.

## Things to Consider When Selecting a Tow Hitch

### Size & Weight



Model dimensions and weight distribution affect towing ability. Most FWE models have a low center of gravity and are ideal for towing. Consult the manufacturing facility to see if towing is a possibility for your unit.

### Towing Environment



Consider the towing environment, terrain, and path of travel when choosing a tow hitch. Keeping in mind any door ways, elevators, sally ports, surfaces, thresholds, and slopes you may encounter while towing.

### Caster Selection



You will need to select one of our three casters that are compatible with a tow hitch. Refer to our caster guide for more details on FWE casters.



GUIDE TO CASTERS




MULTI-TERRAIN



SEMI-PNEUMATIC



MASTER CASTER

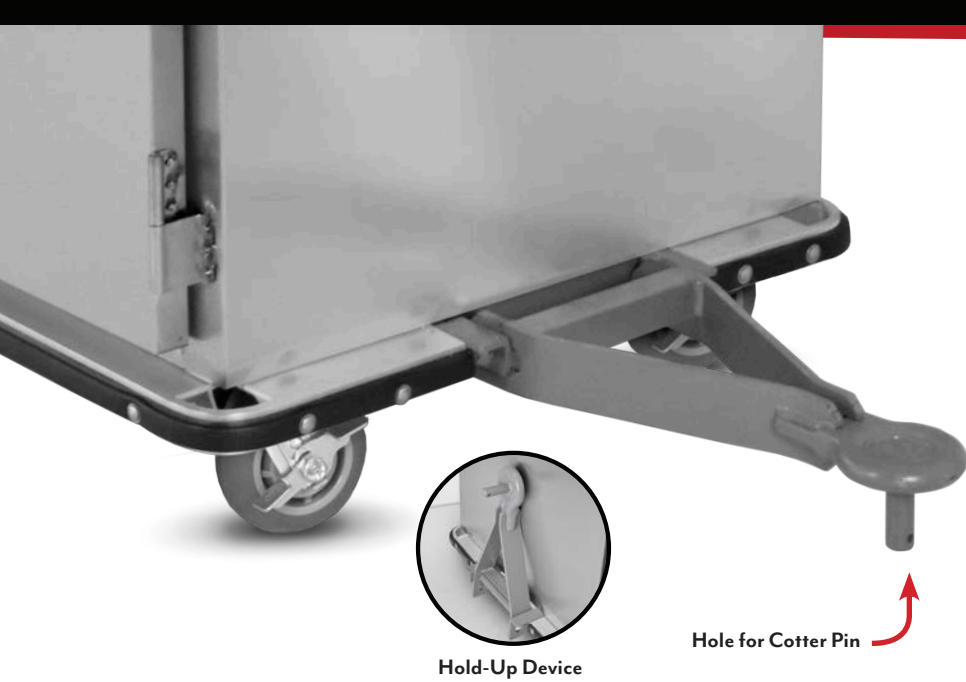

## PIN IN RING HITCH

Built for smooth terrain and fast linking, the pin hitch is perfect for indoor travel. The hitch frame has the dimensions of 20 1/2 inches (L) by 11 inches (W) by 2 inches (H). The pin size can be customized to fit your towing vehicle. With the eye portion being 1 inch thick, it is sturdy enough to pull almost anything.


- ✓ Quick & Easy Linking
- ✓ Ideal for Smooth Terrain
- ✓ Cotter Pin Included
- ✓ Hold-Up Device



## BALL HITCH

FWE uses a 2 inch forged chrome ball paired with a coupler that measures 8 3/4 inches and includes a lockable lever. Coupler is welded to the V-shaped frame for maximum towing strength. The snug ball hitch design suppresses noise and allows for more stable travel over uneven and sloped terrain.


- ✓ Tilt Resistant Ball Style
- ✓ Sloped Terrain
- ✓ Quieter Ride
- ✓ Padlocking Capable
- ✓ Cotter Pin Capable
- ✓ Hold-Up Device

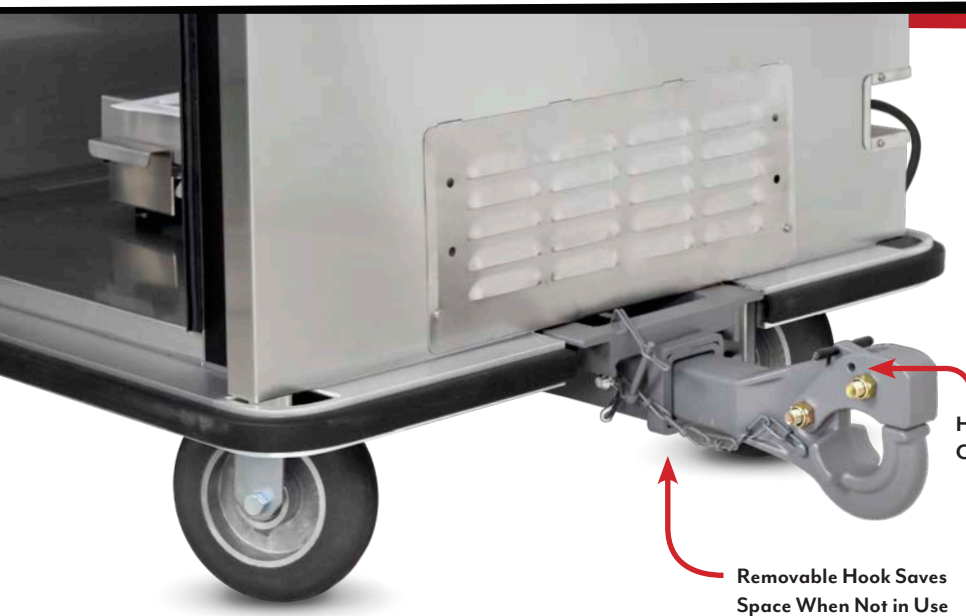

## HOOK IN RING PINTLE HITCH

FWE's hook style "pintle" hitch pairs with a 2 inch receiver and locks around the lunette ring securely. The far reaching length of this hitch allows for a sharper turning radius, and the unique clasp is designed to maneuver through rough terrain.

- ✓ Widest Turn Radius
- ✓ Removable Hook
- ✓ Rough Terrain
- ✓ Cotter Pin Included
- ✓ Hold-Up Device

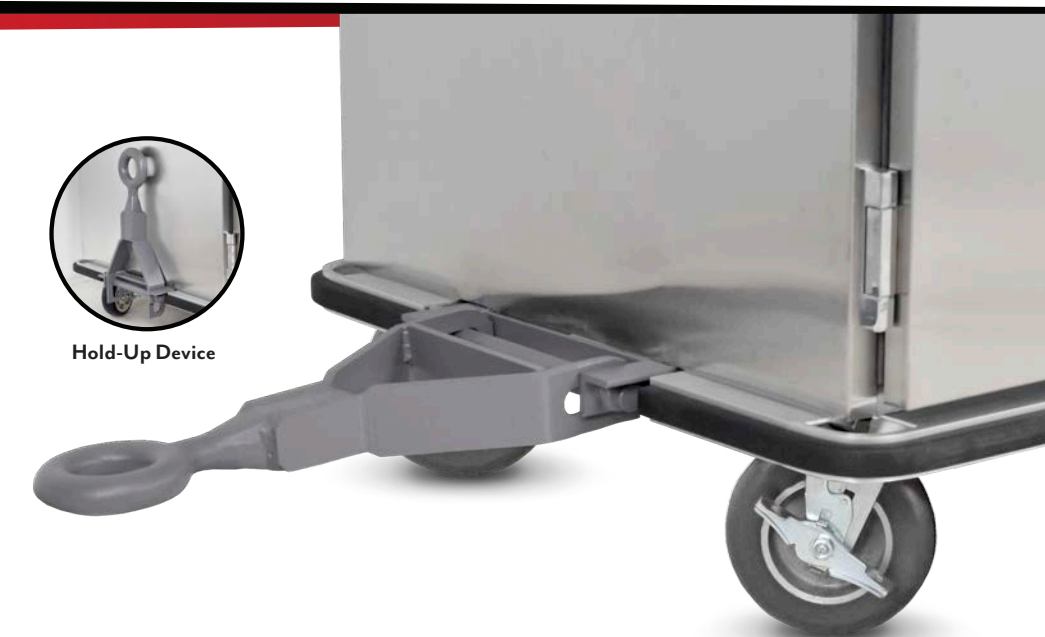

## Top Placement for Hitched Equipment



Stadiums



Colleges



Prisons



Hospitals



Hotels

## Most Common Types of Towing Vehicles



Golf Carts



Electric Tuggers

Let's say you are a member of a catering team at a local university. Your equipment is in the school's cafeteria but you need to keep a special order warm while traveling across campus. You could push it but you have your tablecloths, cutlery, napkins, and etc. to transport. Wouldn't it be easier to load all that into a golf cart and attach your unit to the back of it and tow it to your destination?



### Need a hitch for your next piece of equipment?

Call our manufacturing facility in Portland TN, today! An FWE representative would be happy to assist in providing you with best tow hitch option. FWE also customizes solutions to fit your unique needs.



VERSION 001

MANUFACTURING FACILITIES  
5599 HIGHWAY 31 WEST • PORTLAND, TN 37148

FOOD WARMING EQUIPMENT COMPANY, INC.  
P.O. BOX 1001 CRYSTAL LAKE, IL 60039-1001